


PRÁTICA
FIT
LINE



FITS YOUR **BUSINESS**

THE FIT FAMILY SIZED TO YOUR NEEDS!

MAXIMIZE **EFFICIENCY**
WHILE OCCUPYING
JUST THE **RIGHT SPACE!**

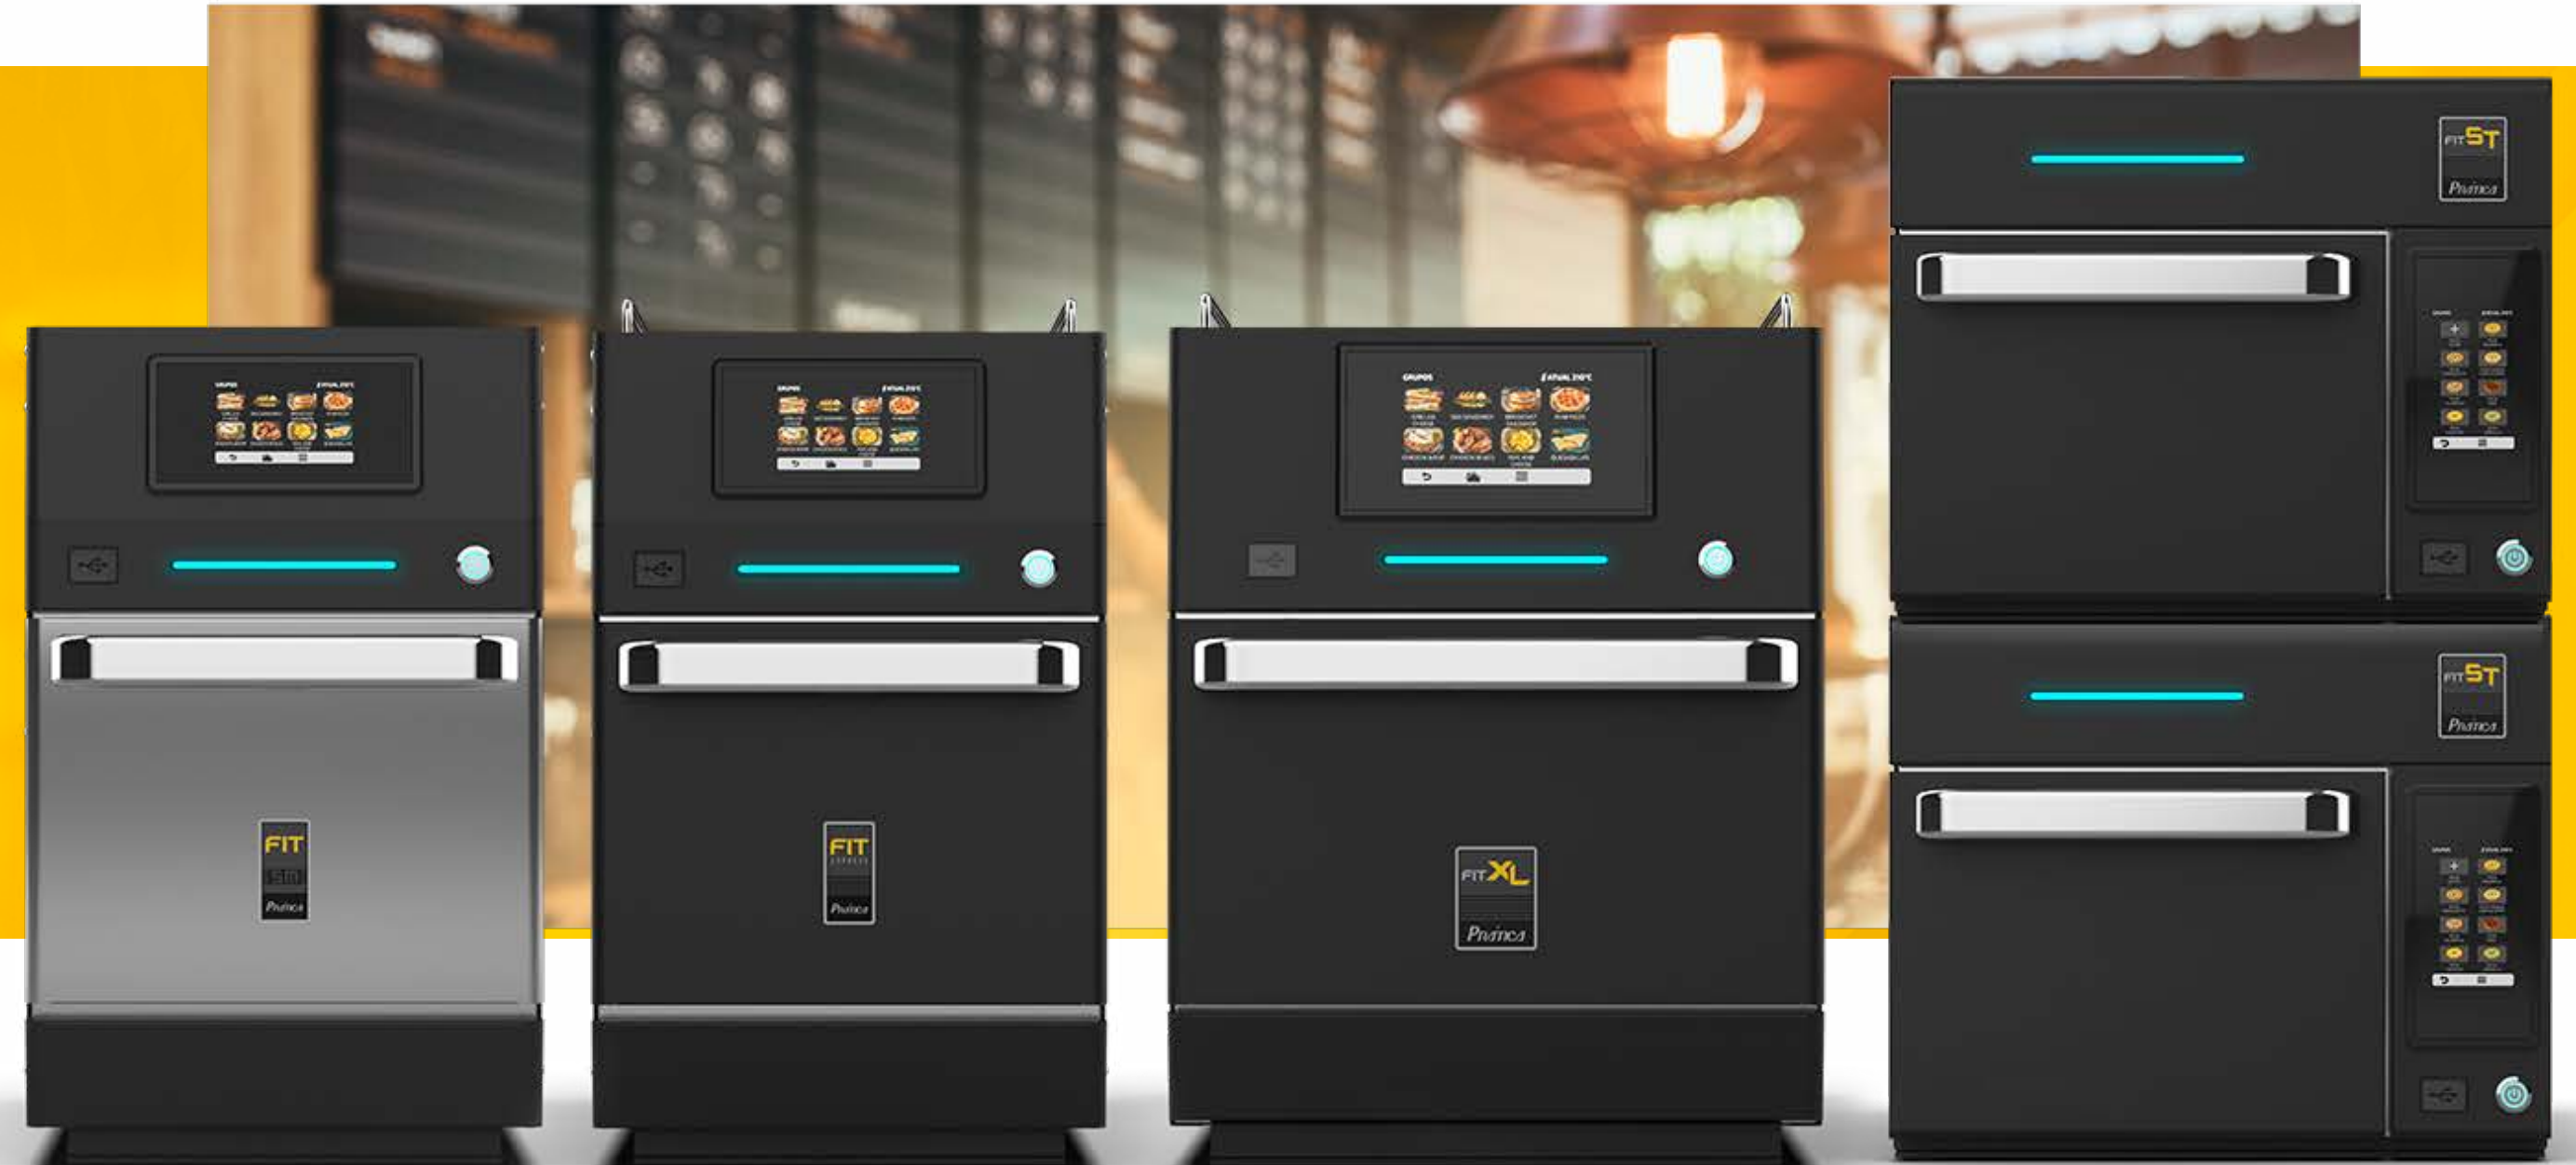

FIT SM

FIT
EXPRESS

FIT XL

FIT ST

FIT LINE



Guaranteed
Standardization with
High-Quality Results.



Ventless - no hoods needed: We
are the only manufacturer with
a removable catalytic converter,
ensuring easy installation and
hassle-free cleaning.



The user-friendly features
ensure intuitive and
uncomplicated operation.



MAIN BENEFITS



PRÁTICA



Low energy consumption
without compromising
results.




Easier cleaning with
a cooking chamber
designed with
rounded corners.



Efficient heat insulation prevents
the surrounding area from heating
up and keeps the surface
cool to the touch.




 FAST FOODS RESTAURANTS

 COFFEE SHOPS

 HOTELS

 RESTAURANTS

 SNACK BARS

 C-STORES

All ovens in the Fit Line are ventless, eliminating the need for installing, cleaning, and maintaining expensive commercial hood systems—even for stacked units!



The average commercial hood costs about \$3,000 per linear foot!

FIT LINE

BOOST YOUR REVENUE

ADDING FOOD INCREASES
YOUR AVERAGE TICKET

With a strategic initial investment, establishments can introduce a curated menu and savory snacks, enticing patrons to linger longer and spend more.



PRÁTICA



FIT LINE

PRÁTICA



MANAGE YOUR OVENS ONLINE

Prática iOK uses your Wi-Fi to allow for seamless management of equipment across multiple locations




MANAGE GROUPS AND RECIPES FROM YOUR COMPUTER

Create, edit, organize, and update recipes, and send them to all connected ovens.



CUSTOMIZE THE DISPLAY IMAGE OF RECIPES

Add icons or customize the recipe with photos of your own dishes.



RECEIVE SOFTWARE UPDATES

Always count on free system improvements, from minor adjustments to major updates, including bug fixes, new interfaces, and features.

FIT LINE

WIDTH
386 mm

COMPATIBLE
DEPTH FOR
COUNTERS OF
600 mm

HEIGHT
619 mm

FIT SM

SECURE **CONSISTENT RESULTS.**

PRÁTICA

*Not recommended for frozen foods.



FIT LINE

WIDTH
386 mm

HEIGHT
619 mm

COMPATIBLE
DEPTH FOR
COUNTERS OF
600 mm

FIT EXPRESS

HIGH PRODUCTIVITY AND VERSATILITY
WITH ELEGANT DESIGN FOR
FRONT-OF-HOUSE DISPLAY.

PRÁTICA

FIT LINE

RECOMMENDED FOR FINISHING FRESH, REFRIGERATED, OR FROZEN FOOD

FIT EXPRESS

Up to 30cm food items



FIT LINE

HEIGHT
658mm

WIDTH
488 mm

FIT XL

MAXIMUM SPACE,
MINIMUM TIME

COMPATIBLE
DEPTH FOR
COUNTERS OF
700 mm

PRÁTICA

FIT LINE

IDEAL FOR LARGER DEMANDS

40cm cavity size!

FIT XL



LINHA **FIT**

FIT **ST**

DOUBLE YOUR CAPACITY
WITHOUT TAKING UP MORE
COUNTER SPACE

PRÁTICA

STACKABLE

HEIGHT
STACKED
850mm

WIDTH
523 mm

HEIGHT
425mm

COMPATIBLE
DEPTH FOR
COUNTERS OF
600 mm











INDIVIDUAL CONTROLS: Each cavity features independent controls, allowing you to cook different food items simultaneously.

FIT LINE

FITST

PRÁTICA

MONITOR YOUR OVEN'S STATUS AT A GLANCE WITH THE LED COLOR INDICATORS.

OPERATING MODE	COLOR	STATUS
Turning on / Stand-by		Flashing light
Preheating		Light on
Temperature control		Light on
Cleaning		Light on
Running recipe		Light on
Finished Recipe		Light on
Failure		Light on
Error		Flashing light





PRACTICAL CLEANING

EASE EXTENDS BEYOND OPERATION!




CLEANING INSTRUCTIONS DISPLAYED DIRECTLY ON THE SCREEN.

The operator is guided through detailed, step-by-step instructions.



OPTION TO VIEW EACH STEP VIA VIDEO

Assisted cleaning with step-by-step video guidance to ensure accuracy throughout the process.

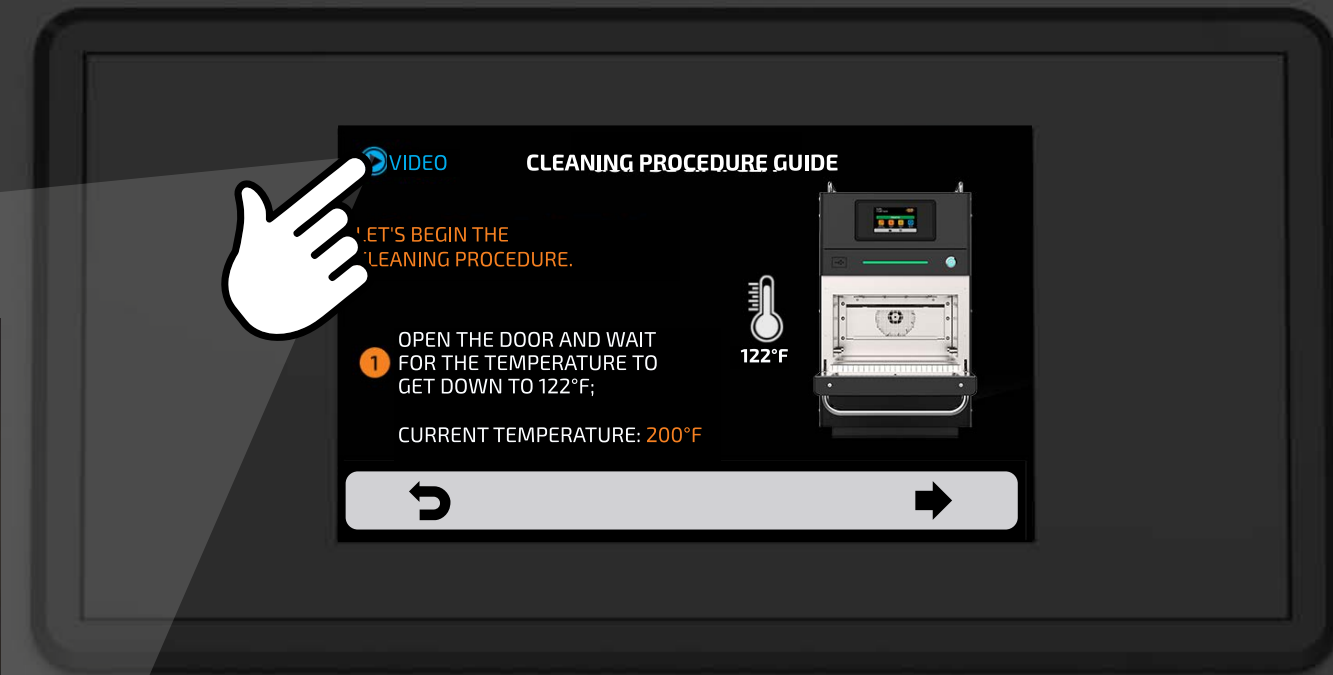

PRÁTICA CLEANING PRODUCTS

Designed to clean and protect speed ovens with greater efficiency.



EASY REMOVABLE CATALITIC CONVERTER

User-friendly removal and installation—no technical support or tools required.



CLEANING PRODUCTS

Prática



EFFICIENCY IN CLEANING

- Ready to use—no dilution required;
- Rinses off easily with a damp cloth;
- Powerful degreasing action: removes even dried and carbonized grease.



EASE OF PROTECTION

Forms a protective film that simplifies future cleanings, saving both on oven cleaner and time.



Safe for the Operator

FIT LINE

FIT LINE

Refrigerated
foods

Frozen
foods

Stackable

Food items
up to 30cm

Food items
up to 40cm

FIT SM



FIT
EXPRESS



FIT XL



FIT ST



FIT LINE

FIT SM



Region	Voltage (V)	Phases	Freq. (Hz)	Power (kW)	*Circuit Breaker (A)	Cable	Socket	
Europe	230	Single	50	3	13	3x1,5 mm ²	13A (2P+E)	NOT PROVIDED
	230	Single	50	3	16	3x1,5 mm ²	16A (2P+E)	

DIMENSIONS

Fit Express	Product dimensions				Boxed product dimensions			
	Height	Width	Depth	Weight	Height	Width	Depth	Weight
	25.9" 659mm	15.1" 386mm	27.3" 693mm	147.7lbs 67kg	32.3" 820mm	21.6" 550mm	35.4" 900mm	189.5lb 86kg
Chamber dimensions	Capacity		Height	Width	Depth			
	0.45 cu.ft 13L		5.2" 133mm	12.4" 315mm	12.1" 308mm			
Wall clearance	Left side		Back	Right side				
	0" 0mm		0" 0mm	0" 0mm				



SILVER

FIT EXPRESS



Region	Voltage (V)	Phases	Freq. (Hz)	Power (kW)	*Circuit Breaker (A)	Cable	Socket	
Europe	230	Single	50	6.8	32	3x4mm ²	32A (2P+E)	
	380	Multi	50	6.5	16	5x2,5 mm ²	16A (3P+N+E)	
	400	Multi	50	6.8	16	5x2,5 mm ²	16A (3P+N+E)	

DIMENSIONS

Fit Express	Product dimensions				Boxed product dimensions			
	Height	Width	Depth	Weight	Height	Width	Depth	Weight
	25.9" 659mm	15.1" 386mm	27.3" 693mm	147.7lbs 67kg	32.3" 820mm	21.6" 550mm	35.4" 900mm	189.5lb 86kg
Chamber dimensions	Capacity		Height	Width	Depth			
	0.45 cu.ft 13L		5.2" 133mm	12.4" 315mm	12.1" 308mm			
Wall clearance	Left side		Back	Right side				
	0" 0mm		0" 0mm	0" 0mm				



BLACK SILVER

FIT ST



Region	Voltage (V)	Phases	Freq. (Hz)	Power (kW)	*Circuit Breaker (A)	Cable	Socket	
Europe	230	Single	50	6.8	32	3x4 mm ²	32A (2P+E)	
	380	Multi	50	6.5	16	5x2,5 mm ²	16A (3P+N+E)	
	400	Multi	50	6.8	16	5x2,5 mm ²	16A (3P+N+E)	

DIMENSIONS

Fit ST	Product dimensions				Boxed product dimensions			
	Height	Width	Depth	Weight	Height	Width	Depth	Weight
	16.7" (425mm)	20.4" (518mm)	27.4" (697mm)	158.7lbs 72kg	28.4" (722mm)	24.4" (620mm)	32.5" (825mm)	207.2lbs 94kg
Chamber dimensions	Capacity		Height	Width	Depth			
	0.45 cu.ft 13L		5.2" (133mm)	12.4" (315mm)	12.1" (308mm)			
Clearance	Left side		Back	Right side				
	0" (0mm)		0" (0mm)	1" (25mm)				



BLACK SILVER

PRÁTICA

FIT XL



Region	Voltage (V)	Phases	Freq. (Hz)	Power (kW)	*Circuit Breaker (A)	Cable	Socket	
Europe	230	Single	50	6.8	32	3x4 mm ²	32A (2P+E)	
	380	Multi	50	6.5	16	5x2,5 mm ²	16A (3P+N+E)	
	400	Multi	50	6.8	16	5x2,5 mm ²	16A (3P+N+E)	

DIMENSIONS

Fit XL	Product dimensions				Boxed product dimensions			
	Height	Width	Depth	Weight	Height	Width	Depth	Weight
	25.9" (658mm)	19.2" (488mm)	31.3" (795mm)	180.8lbs 82kg	35.6" (905mm)	23.2" (590mm)	37.8" (960mm)	227lbs 103kg
Chamber dimensions	Capacity		Height	Width	Depth			
	0.83 cu.ft 23.7L		5.5" (139mm)	16.4" (417mm)	16.1" (410mm)			
Clearance	Left side		Back	Right side				
	0" (0mm)		0" (0mm)	0" (0mm)				



BLACK SILVER

*Prática recommend installing a type D circuit breaker whilst remaining in accordance with local regulations.

PRÁTICA

www.praticabr.com/en

contact@praticabr.com